

2-WHEELED BINS

WEBER MGB 240L

IN ACCORDANCE WITH EN 840



THE MOST POPULAR SIZE
BY OPTIMAL VOLUME

- // SOLID LID
- // STABLE FULL-LENGTH HANDLE
- // ERGONOMIC CHASSIS




MGB 60L / 80L / 120L / 140L / 180L / 240L / 360L WEBER 2-WHEELED BINS IN ACCORDANCE WITH EN 840

- Weber 2-wheeled MGB manufactured from HDPE using the compact injection moulding method in accordance with EN 840-1
- resistant to UV, cold, heat and chemicals
- galvanised steel axle (corrosion resistant)
- standard wheels with solid rubber tyres Ø 200 x 50 mm carrying capacity 100kg/wheel – other options available
- MGB 140, 180, 240 L with optional Ø 250 mm wheels and MGB 360 L with optional Ø 300 mm wheels
- chip-nest according to DIN 30745:2014 and RAL GZ 951/1
- standard colours grey, green, blue and brown – other colours available on request



WEBER 2-WHEELED MGB	60L	80L	120L	140L	180L	240L	360L
Nominal volume (l)	60	80	120	140	180	240	360
Nominal payload (kg)	40	40	48	56	72	96	144
Empty weight ca. (kg)	8,5	8,5	8,2	10,0	11,0	11,7	18,9
A Lid, width (mm)	421	421	440	440	440	533	580
B Wheel Ø (mm)	200	200	200	200/250	200/250	200/250	200/300
C Travelling gear, width (mm)	445	445	490	480	485	575	578
D Body, height (mm)	884	881	868	995	997	985	1005
E Total height (mm)	935	939	930	1050	1063	1067	1098
F Total depth (mm)	520	520	550	550	712	720	878
G Total width (mm)	445	445	475	478	477	576	596
K Customer field 197 x 30 mm for all 2-wheeled bins (customer name or blank)							

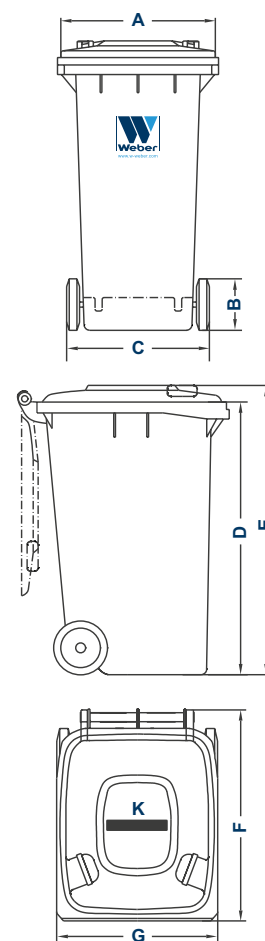

We reserve the right to make dimensional and constructional alterations